


## VALVED WEAKLINK BREAKAWAY COUPLING

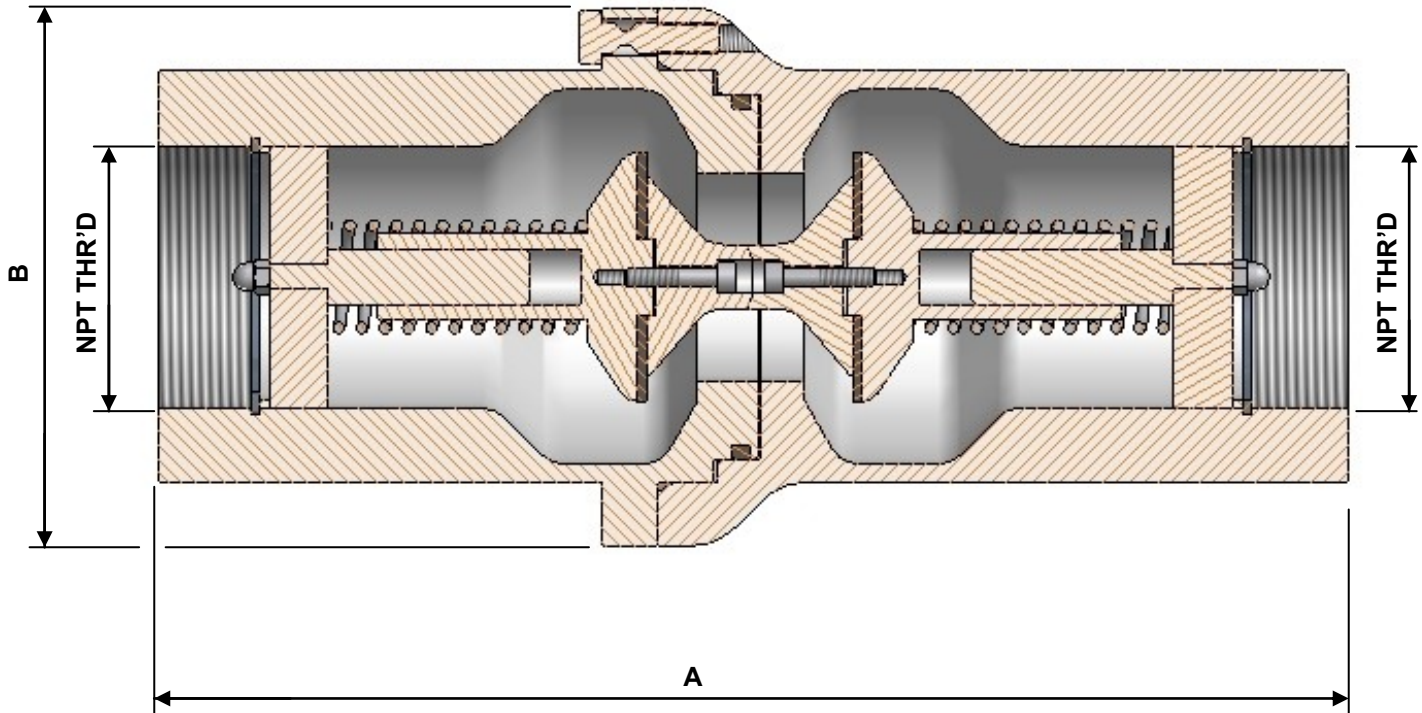

COUPLING SIZE	COMPLETE COUPLING PART No.	APPROX LENGTH 'A'	DIA 'B'	NPT FEM THREAD
2"	WLVAC5-032	236mm	136	2"
3"	WLVAC5-048	385mm	150	3"
4"	WLVAC5-064	385mm	175	4"
5"	WLVAC5-080	395mm	205	5"

Breakaway Load: 3T (other loads available on request)  
 Material: Stainless Steel 316 or Carbon Steel (internal components stainless steel)  
 Max. Working Pressure: 300 psi (20 bar)

Full range of elastomeric seals available to suit service

3", 4", 5" and 6" sizes also available with NPT male and hose tail connections

Completely serviceable, all components can be replaced

Also available in unvalved variants