


Salamander Bulk Material Suction and Delivery

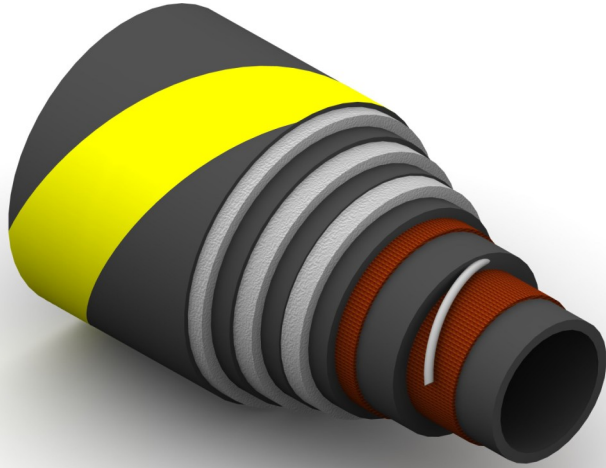

Construction:

Tube: Black SBR/NR Blend, Abrasion Resistant.

Reinforcement: High Tensile Textile Cords with Embedded Steel Helix Wire.

Intermediate Cover: Black IR/BR Blend;

Flotation Element: 3 Layers of PE Foam.

Cover: Black IR/BR blend, Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

Suitable for media of up to specific gravity of 1.6g/cm³

Minimum Reserve Buoyancy of 25% Using OCIMF Standard Calculations For All hose.

Note: Finished Hose Dimensions May Be Subject To Change Depending On Specific Gravity of Medium Transported.

Branding:

BULK MATERIAL S&D - 20 Bar WP - PHOENIX Beattie

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
BM20HFL-064	102	4	203	20	300	80	1200	550	12.10
BM20HFL-080	127	5	230	20	300	80	1200	700	14.70