


FIRESHIELD 5000 Blowout Preventer Control Hose.

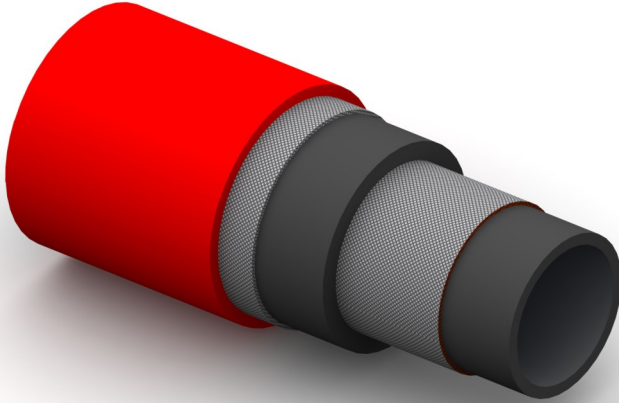

Construction:

Tube: Black CR Rubber.

Reinforcement: 1/4" & 3/8", Two Wire Braid, Others 4 or 6 Wire Spirals.

Cover: Red Flame Retardent CR Rubber Over Layers Of Heat Resistant Fibre.

Temperature Range: -40°C To +100°C.

Fire Rating:

Lloyds Approved (OSG/100/499) At 700°C For 5 Minutes.

Branding:



Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
FS50-04	6.5	1/4	20.0	345	5000	1379	20000	110	0.65
FS50-06	9.5	3/8	24.0	345	5000	1379	20000	150	0.80
FS50-08	12.7	1/2	30.0	345	5000	1379	20000	250	1.25
FS50-12	19.1	3/4	37.0	345	5000	1379	20000	330	1.90
FS50-16	25.4	1	44.0	345	5000	1379	20000	375	2.65
FS50-20	31.7	1.1/4	58.0	345	5000	1379	20000	460	4.20
FS50-24	38.1	1.1/2	63.0	345	5000	1379	20000	520	5.10
FS50-32	50.8	2	77.0	345	5000	1379	20000	700	7.50