


FW3 Seawater Delivery
Fire Resistant

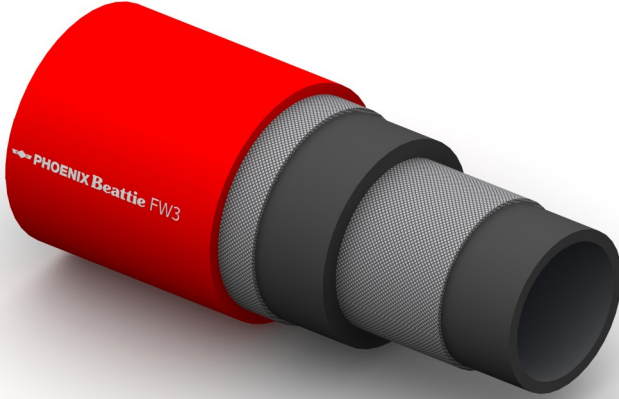

Construction:

Tube: Black CR Rubber.

Reinforcement: Steel Cord Layers.

Cover: Red Smooth CR.

Temperature Range: -30°C To +100°C.

Typical Application: Water Delivery.

Fire Rating: Lloyds Approved at 700°C for 30 Minutes

Branding:



Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
FW3-032	51	2	79	21	305	104	1500	400	4.78
FW3-048	76	3	107	21	305	104	1500	500	7.13
FW3-064	102	4	134	21	305	104	1500	600	7.46
FW3-080	127	5	156	21	305	104	1500	1030	9.56
FW3-096	152	6	184	21	305	104	1500	1140	14.02
FW3-128	203	8	242	21	305	104	1500	1250	22.54