


Salamander Liquid Mud Suction and Delivery

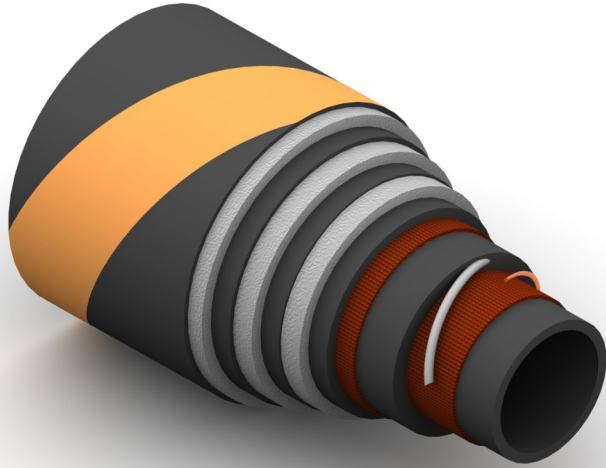

Construction:

Tube: Black NBR.

Reinforcement: High Tensile Textile Cords with Embedded Steel Helix Wire and Anti Static Wire.

Intermediate Cover: Black CR/BR Blend;

Flotation Element: 3 Layers of PE Foam.

Cover: Black CR/BR blend, Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: : Liquid Mud containing Crude Oil and Grit suction & delivery in offshore applications. Also suitable for Fuel Oil suction & delivery with up to 50% Aromatic Content.

Suitable for media of up to specific gravity of 1.6 g/cm³.

Minimum Reserve Buoyancy of 25% Using OCIMF Standard Calculations For All hose.

Note: Finished Hose Dimensions May Be Subject To Change Depending On Specific Gravity of Medium Transported.

Branding:

LIQUID MUD S&D - 40 Bar WP - PHOENIX Beattie

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
LM40HFL-064	102	4	207	40	600	160	2400	700	13.50