


# Salamander Potable Water Suction and Delivery

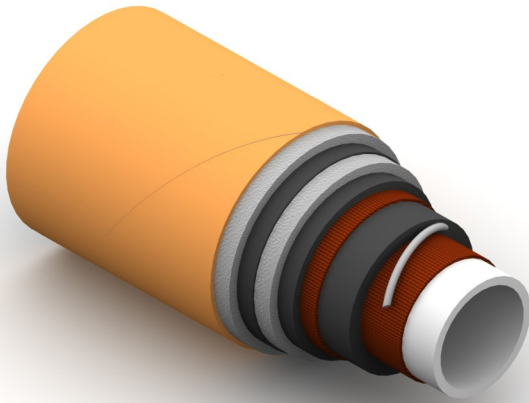

**Construction:**

**Tube:** White UHMWPE (Ultra High Molecular Weight Polyethylene).

**Reinforcement:** High Tensile Textile Cords with Embedded Steel Helix Wire.

**Intermediate Cover:** Black CR/BR Blend.

**Flotation Element:** 2 Layers of PE Foam.

**Cover:** Orange CR/BR Blend, Abrasion, Ozone and Hydrocarbon Resistant.

**Temperature Range:** -35°C To +100°C.

**Typical Application:** Potable Water Transfer.

Minimum Reserve Buoyancy of 25% Using OCIMF Standard Calculations For All hose.

Note: Finished Hose Dimensions May Be Subject To Change Depending On Specific Gravity of Medium Transported.

**Branding:**

**POTABLE WATER S&D - 20 Bar WP - PHOENIX Beattie**

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
PW20HFL-048	76	3	148	20	300	80	1200	450	7.70
PW20HFL-064	102	4	175	20	300	80	1200	550	10.80
PW20HFL-080	127	5	203	20	300	80	1200	700	13.60